


Profile PIKO

Ref. A08288

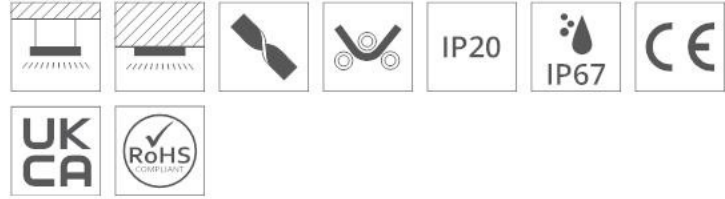

- Possibility of installing sealed 5K series LED strips
- Minimum width and height
- Small bending radius

APPLICATION

- furniture and decorative lighting


MOUNTING

- to the surface, suspended or recessed, using dedicated accessories, with double-sided adhesive tape or mounting adhesive
- easy assembly and disassembly by snapping in and out

ADDITIONAL INFORMATION

- for suspending small-size profiles, it is recommended to use a wire with a diameter of 0.5 mm
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 67
Possible fixture shapes	linear, round
Profile cross-section	rectangular
Width	10 mm
Height	7 mm
LED gluing width A	7 mm
Width of the glow	7.2 mm
Max power of a single KLUŚ LED strip	9.6 W/m
Closet Rated	yes
Possibility of twisting	yes
Possibility of bending	yes
Radius of the light arc	yes
Inward	150 mm
Outdoor	150 mm
Building type	Retail, Entertainment/ Arts, HoReCa object

Color	Length	Ref
■ silver anodized	1000 mm	A08288A_1
	2005 mm	A08288A_2
	3010 mm	A08288A_3
■ black anodized	1000 mm	A08288A07_1
	2005 mm	A08288A07_2
	3010 mm	A08288A07_3

Profile PIKO

Ref. A08288

Facility zone	furniture, bathroom, kitchen, office, advertising / POS, shop windows and exhibition
Easy assembly and disassembly by snapping in and out	yes
The cover is cut to the length of the profile	yes
Wire out end cap	yes
Wire out back of extrusion	yes

SAMPLE PROJECTS



RELATED ACCESSORIES > COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover BENCO-7	silicon	53 %	frosted	B17069F
Cover PIKO-7	PMMA	17 %	black	B17001B

RELATED ACCESSORIES > END CAPS

NAME	MATERIAL	COLOR	REF.
End cap PIKO	ABS	black	C24202C07
		gray	C24202C02
End cap with hole PIKO-OTW	ABS	black	C24202C07TW
		gray	C24202C02TW

Profile PIKO

Ref. A08288 Strip Options

SLIM LEDFLEX 10W



Technical Specification

LEDs/M	Lumens/W	Lumens/M	Wattage	Voltage	Colour (K)	SDCM	Lumen Maintenance	CRI	IP
240	85	900	10	24	2700	3	L80>30,000hrs	>90	20
240	85	900	10	24	3000	3	L80>30,000hrs	>90	20
240	85	900	10	24	4000	3	L80>30,000hrs	>90	20

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CANOPIES



CANOPIE
Fi-60mm
C24540

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES



FASTENER
FI-8-LIN-MR
C28172N00, C28172L10,
C28172L07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES



FASTENER
FI-8-PRET-MR
C28187



FASTENER
K-10-PP
C28235N00



FASTENER
K-10-WL
C28237N00



FASTENER
K-10-WP
C28236N00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS



MOUNTING BRACKET
K-10
C24340C00

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER



HERMETIC COUPLER
THB.391.A4A, 4 pin
C42268C10



HERMETIC COUPLER
THB.381, 2pin
C28125C07



HERMETIC COUPLER
THB.391.A5A, 5 pin
C28156C07



JOINT CONNECTOR
THB.200.E5E, 5 pin
C28157C07

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SUSPENSION AND MOUNTING SETS



FASTENER SET
FI-8-MR-1
C28136



FASTENER SET
FI-8-MR-2
C28137

RELATED ACCESSORIES > ELECTRONICS > SWITCHES



UNI-11
E61603



UNI-P
E61580